CLOSURE | DEMARCATION BOX

DEXGREEN

2 X GROMMETS FOR CABLE

EXTRUDED SEAL

ALL CONNECTIVITY TYPES (SC OR LC TO BACK). TEST POINT POSSIBLE THROUGH CONNECTIVITY OPTION.

LEFT ENTRY FOR CABLE

RIGHT ENTRY FOR CABLE (MULTIPLE CABLES COMPATIBILITY WITH SEALING GROMMETS)
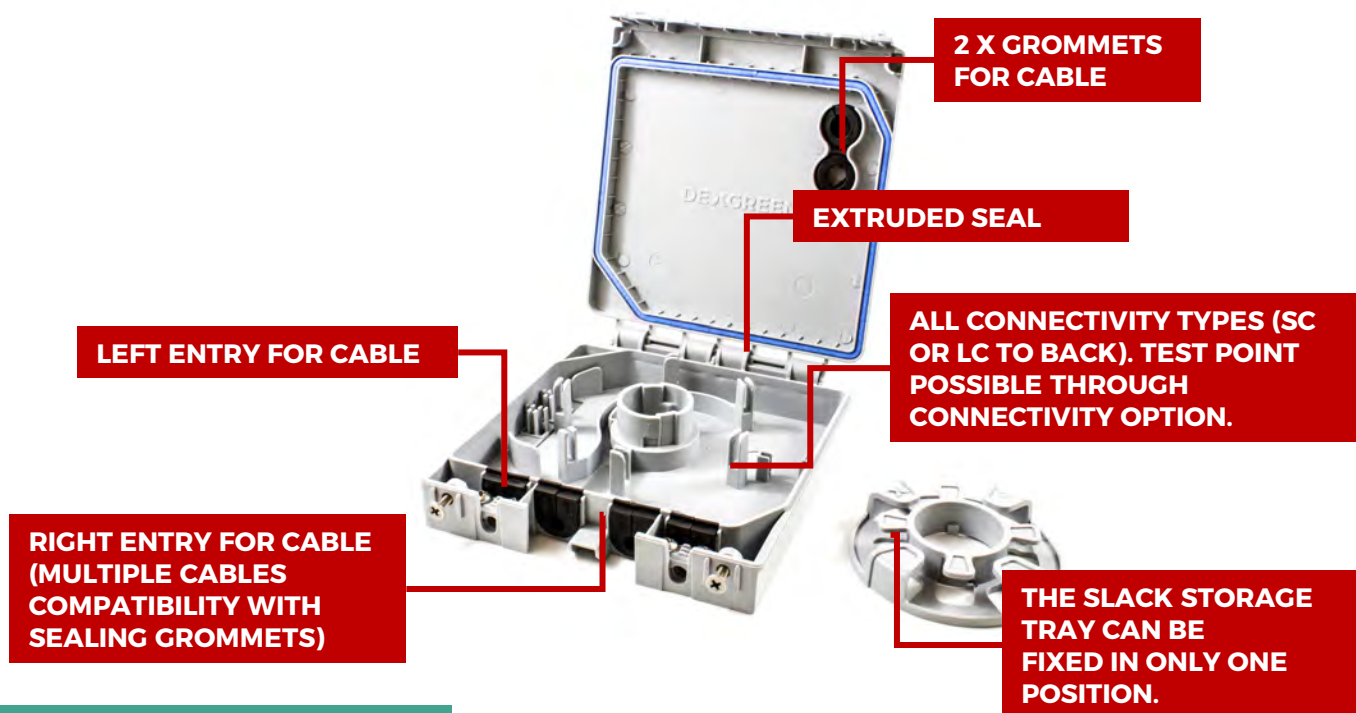
THE SLACK STORAGE TRAY CAN BE FIXED IN ONLY ONE POSITION.

DESCRIPTION

Application

- External demarcation enclosure for FTTH networks, with either splicing or connector connectivity options, therefore acting as a test point in the network also. Multiple cable entries/exists give installer flexibility for all installation scenarios.
- Slack storage is incorporated into the unit and it is designed to be compatible with multiple different cable configurations.
- Can also be used for Copper access network provisioning as it has a designated section for Copper crimp connectors.

nqa. ISO 9001 QUALITY MANAGEMENT

nqa. ISO 14001 ENVIRONMENTAL MANAGEMENT

CLOSURE | DEMARCATION BOX

DEXGREEN

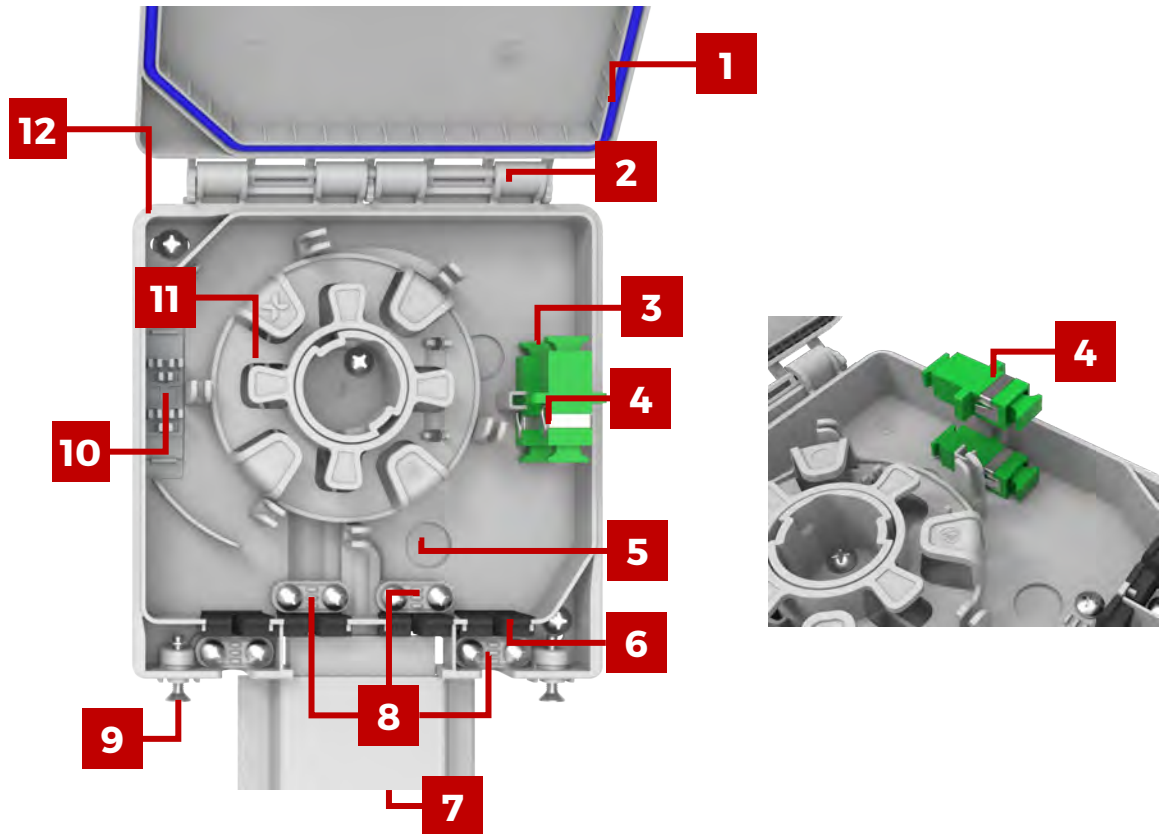## DESCRIPTION *Continued*

Discrete & Compact

- By nature of its compact size and aesthetically pleasing design, it discretely blends in to the external façade of the customer's premises. It can be secured on to all façade types with standard fastenings screws provided with it
- In addition to this it is designed to fit with legacy network accessories, i.e. capping, cables, etc.
- Dimensions: L: 150mm x W: 143mm x H: 33mm

Secure and Robust

- Secure and discrete screw locking mechanism protects the splice / connectors inside it.
- IP56 water-proofing and UV stabilised material ensures it performs well under a range of climatic conditions

nqa. **ISO 9001** QUALITY MANAGEMENT

nqa. **ISO 14001** ENVIRONMENTAL MANAGEMENT

FEATURES & BENEFITS

1. IP56 waterproof rating with rubber seal compression
2. 90˚ & 180˚ snap lock opening position
3. Test point possible through connectivity option
4. All connectivity types (SC or LC back to back), not supplied. Availability for 2 x adaptors
5. Copper provisioning showing crimp connector entry & storage
6. Multiple cables compatibility with rubber grommets
7. Compatible with legacy copper network capping
8. Multiple cable exit points (rear and bottom)
9. CSP security points (M4 threaded bushes used for all fastening points)
10. Up to 6 splices capacity Inc. reflectors
11. High cable storage slack (3m length @ 3mm diameter)
12. Compact size (L: 166/ W:144/ H:33 mm)